


BRX

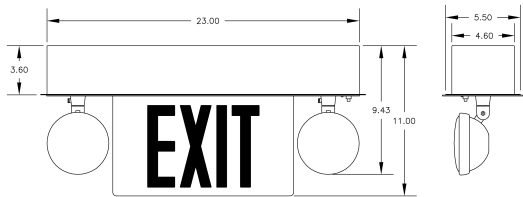

Options

Add Suffix to Catalog Number

-PA Plenum Construction



Made in USA

Series Features

- Integrated Solid State System
- Multi-Rate, Controlled, Automatic Charger
- Lock Out (Automatic Battery Connect)
- Low-Voltage Battery Cutoff
- Brownout Sensitivity
- Fused AC Input & DC Output Circuit Protection
- Dual-Voltage Transformer for 120/277 VAC Operation
- Maximum Input Rating
120 VAC 60Hz 0.35 Amps
277 VAC 60Hz 0.15 Amps
- Light-Emitting Diodes – 25+ Year Life
- (2) 6VDC, 8-Watt PAR-36 Sealed Beams
- (2) 6VDC, 6-Watt HIT Lamps (PH)
- Sealed Lead Calcium Battery
- 6-Volt Operation
- Maintenance-Free Battery
- Fully Recessed Styling
- Designed for Use in 2 foot Grid (T-bar) Drop Ceiling
- Easy Access Battery Panels
- 20-Gauge Steel Housing
- White Powder Coat Finish
- Red (Power On) Indicator
- Test Switch

Specify Chevron Configuration on all Edge-Lit Signs

Blank = No Chevron
 CR = Chevron Right >
 CL = Chevron Left <
 CD = Chevrons Dual < >
 CRCL = Chevron Right Chevron Left (1) > (2) <
 (Double-Face Only – 1 Chevron per Face)

Unit Information

Model Number	Watts per Hour								Replacement Battery
	1.5	2	3	4	5	6	7	8	
BRX	18	14	9	7	-	-	-	-	(1) S68

Ordering Information

BRX	1	W	R	W	-PH
Series	# Faces	Trim Color W hite*	Letter Color R ed G reen	Background Color Blank – None W – White	Head Type Blank - Rnd PH Plastic Heads
	1 2				

*Standard †Standard Background Color of Single-Face Sign is Clear (Blank).